

Technical data sheet

MINIFLUX Sanitary



More than just pumps

MINIFLUX Sanitary



Advantages/characteristics:


- ▶ To transfer out of IBCs and other containers with outlet connection at the bottom
- ▶ Particularly suitable for hygiene applications
- ▶ For horizontal use / dry installation outside the container - medium only comes into contact with the inside of the pump.
- ▶ Designed with minimal dead space and easy to clean
- ▶ No greased seals - no risk of grease being carried over into the medium
- ▶ Can be disassembled without tools
- ▶ Emptying IBCs with residual quantity of less than 1 % (depending on the inclination angle)
- ▶ Can be combined with commutator motors, brushless motors and air motors
- ▶ Suitable for continuous operation, dry running to a limited extent
- ▶ Version with ETFE rotor FDA CFR 21 compliant
- ▶ Version with stainless steel rotor



MADE IN GERMANY




Dismantled for cleaning in 20 seconds

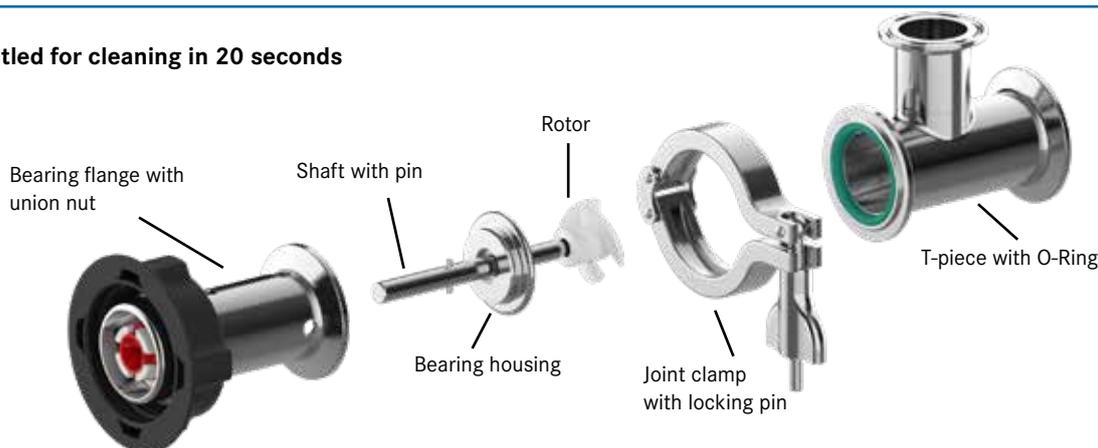

Performance data	
Delivery rate max.	63 GPM (240 l/min) *
Viscosity max.	1,000 cPs *
Delivery head max.	42.6 ft (13 mWs) *
Connection	
Inlet connection	Clamp 2" (or S60x6 adapter)
Discharge connection	Clamp 1 1/2"
Materials	
Outer tube	Stainless steel (316 Ti)
Lip seal	PTFE
Seals	FKM / EPDM
Rotor	ETFE / Stainless steel
General data	
Total length	7.85 in (199.5 mm)
Weight	3.97 lbs (1.8 kg)
Media/ambient temperature max.	max. 212°F (100°C)

Performance chart

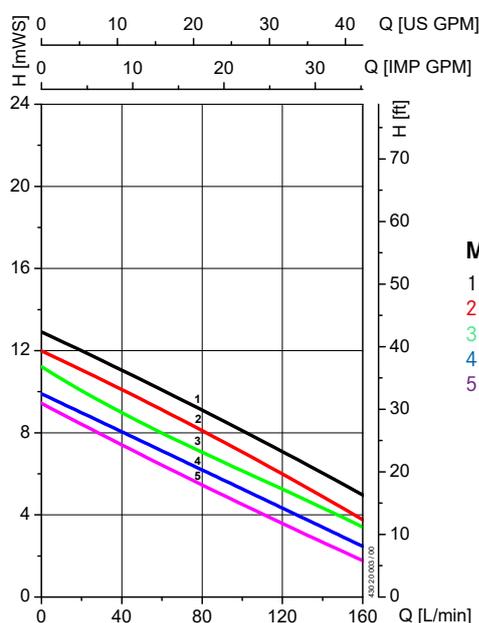

Motor:

1. F 416 Ex
2. F 457/F 458-1/F 460-1 Ex
3. FBM 4000 Ex
4. FEM 4070
5. F 458/F 460 Ex

* depending on motor and medium, measured at free outlet

measured at free outlet, water 68°F (20°C), values ±10 %

Technical data sheet

MINIFLUX Sanitary




More than just pumps

Rotor	Seal	Part number pump	Part number Pump incl. adapter with S60x6 connection, seal and hinged clamp
Compliant with EC 1935 / 2004			
Stainless steel	FKM	10-430 20 008	10-430 20 012
Stainless steel	EPDM	10-430 28 003	10-430 28 004
Compliant with FDA CFR 21			
ETFE	FKM	10-430 20 006	10-430 20 007
ETFE	EPDM	10-430 28 001	10-430 28 002



Dimensional drawing [mm]

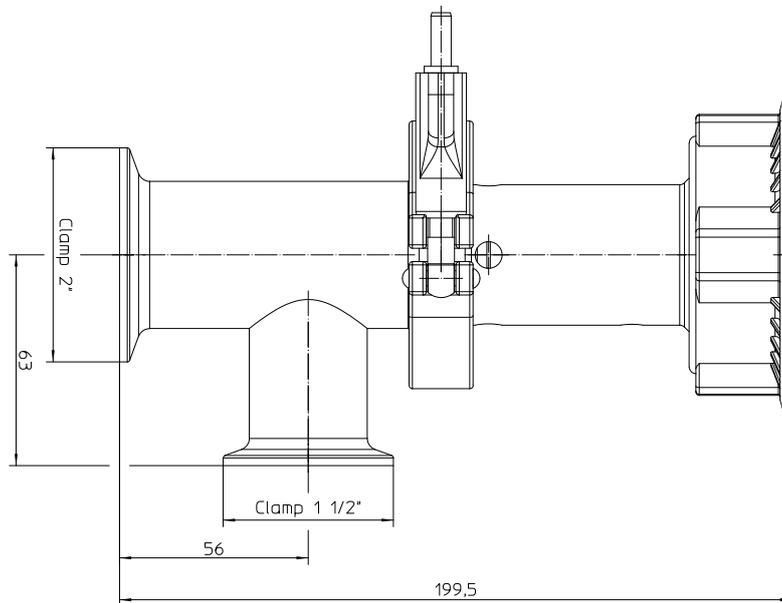

FLUX PUMPS CORPORATION
 300 Townpark Drive, Suite 130
 Kennesaw, GA 30144, USA
 Phone 800-367-3589
info@fluxpumpsusa.com
www.fluxpumpsusa.com